

Adapter Panels

Adapter panels are available with any industry standard connector type, and fiber counts range from 6 to 24 per panel. Panels are constructed of durable steel, compared to some competitor's flimsy plastic construction. Panels are a black powder coat finish with easily visible white silk screen ports. SC, LC, ST and FC adapters are all ceramic material. MTRJ and MPO/MTP® are thermoplastic materials.

Panels are offered with standard coloring options per fiber type and polish or a color-coded non-keyed offering for secured solutions.

STANDARD COMPLIANCES

TIA/EIA-455-21A
 TIA/EIA 568-B.3
 TIA/EIA-604-10
 TIA/EIA-604-3
 TIA/EIA-604-2
 TIA/EIA-604-4
 TIA/EIA-604-12
 TIA/EIA-604-5

LC Connectors
 SC Connectors
 ST Connectors
 FC Connectors
 MTRJ Connectors
 MPO (Including MTP®) Connectors

ORDERING INFORMATION

DMAP(A)-(BB)(C)-(DD)

(A) Select Family Specification

C Classic
 P PRM
 X LGX Compatible

(BB) Select Fiber Count


06 - 24

(C) Select Fiber Type

Y Single mode
 F 62.5µm OM1
 E 50µm OM2
 G 50µm OM3/4
 W 50µm OM5

(DD) Select Connector Type

21 FC
 28 FC/APC
 30 LC Simplex
 31 LC Duplex
 38 LC/APC Duplex
 39 LC/APC Simplex
 3S LC Duplex Internally Shuttered
 44 MTRJ
 45 MTP®
 60 SC Simplex
 61 SC Duplex
 65 SC/APC Simplex
 68 SC/APC Duplex
 67 ST
 Q1 LC Quad (LGX Only)
 QS LC Quad Internally Shuttered*

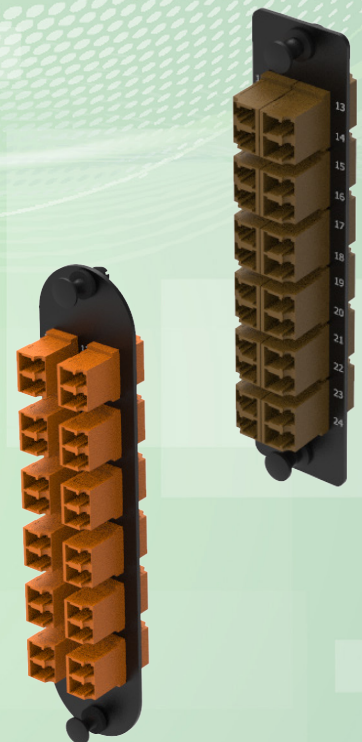

- Adapters are colored per fiber and polish type. Single-mode UPC are blue, APC are green.
- OM1 are beige, OM2 black, OM3/4 aqua, and OM5 are lime green.
- ST and FC are metal bodied with color dust caps.
- MTP Single-mode connectors are standard APC polish, green housing colors. Low loss performance is mustard.
- Many other colors are available for MTP adapters, please consult the MTP Solutions section for additional information.

* Internally Shuttered LC adapters are only available in a quad port adapter for 24 fiber LGX compatible panels