


Non-Armored

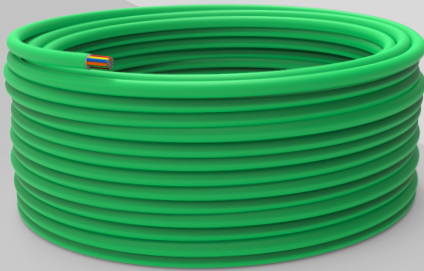

Trunk cables are highly configurable with connector and fiber types, jacket colors, flame ratings, lengths, and breakouts. If you are having trouble configuring an assembly below, please contact us for assistance. If the jacket color is not specified, the standard color is black, with print denoting optical information.

Hybrid Trunk Cables - Single Fiber Connectors, ORDERING INFORMATION

(X*)(AA)(BB)(CCC)H-(DDD)(E)(FFF)(G)(H)(I)(JJJ)F

(X*) Use P for eye, "B" for both ends, leave blank if not needed

(AA)&(BB) Select Connectors

30	LC simplex
31	LC duplex
32	LC 2.0mm simplex
38	LC/APC duplex
39	LC/APC simplex
60	SC simplex
61	SC duplex
62	SC 2.0mm simplex
65	SC/APC simplex
68	SC/APC duplex

(CCC) Select Fiber Count

004 to 288

H - Standard for Hybrid

(DDD) Select Fiber Count First Fiber Type

004 to 288

(E) Select Fiber Type

Y	OS2 10mm bend (standard)
Z	OS2 5.0mm bend
F	OM1
E	OM2
G	OM3
M	OM4
W	OM5 (WBMMF)**

(FFF) Select Fiber Count First Fiber Type

004 to 288

(G) Select Fiber Type

Y	OS2 10mm bend (standard)
Z	OS2 5.0mm bend
F	OM1
E	OM2
G	OM3
M	OM4
W	OM5 (WBMMF)**

(H) Select Jacket Color

B	Blue
N	Orange
G	Green
W	Brown
T	Slate
H	White
R	Red
K	Black
Y	Yellow
V	Violet
S	Rose
A	Aqua
L	Lime Green

(I) Select Cable Type and Rating

2	Indoor, OFNP
9	Indoor, OFNR
Z	Indoor, LSZH
N	Indoor/Outdoor, OFNR
T	Indoor/Outdoor, OFNP
A	Indoor, OFCP Armored
R	Indoor, OFCR Armored
U	Indoor/Outdoor OFCR Armored
D	Indoor/Outdoor OFCP Armored
H	Indoor/Outdoor LSZH Non-Armored
S	Indoor/Outdoor LSZH Armored

(JJJ) Select Length (3 digits)

001 - 999