

## Non-Armored

### SINGLE-MODE

The standard single-mode offering is a 10mm OS2 bend insensitive fiber. Bend performances of 7.5mm and 5.0mm are also available.

#### COMPLIANCES

- ICEA S-83-596 UL1666
- TIA492-CAAB
- TIA-568-C.3

#### NUMERICAL APERTURE

- .14 (characterized)

#### AVAILABLE FIBER TYPES

- G.657.A1 10mm bend (standard offering for OMNIA and IllumiCore)
- G.657.A2/B2 7.5mm bend
- G.657.B3 5.0mm bend
- G.652.D

### MULTIMODE 62.5µm OM1

The standard single-mode offering is a 10mm OS2 bend insensitive fiber. Bend performances of 7.5mm and 5.0mm are also available.

#### COMPLIANCES

- ICEA S-83-596 UL1666
- TIA492-AAAA-A
- TIA-568-C.3
- ISO/IEC 11801 Type OM1
- IEC 60793-10 UL1666

#### NUMERICAL APERTURE

- $.275 \pm 0.015$

#### AVAILABLE FIBER TYPES

- 62.5µm OM1 (standard offering for OMNIA and IllumiCore)

### MULTIMODE 50µm OM2, OM3, OM4, and OM5

Each of the 50-micron options are a bend-insensitive fiber. Cable jackets are colored for easy bandwidth performance identification: OM2 orange, OM3/4 aqua, and OM5 lime. Custom colors are always available.

#### COMPLIANCES

- ICEA S-83-596 UL1666
- TIA-568-C.3
- TIA492-AAC-B (OM3)
- TIA492-AAAB-A (OM2)
- TIA492-AAAD (OM4)
- TIA492-AAAE (OM5)


#### NUMERICAL APERTURE

- $.20 \pm 0.015$

#### AVAILABLE FIBER TYPES

- OM2
- OM3
- OM4
- OM5



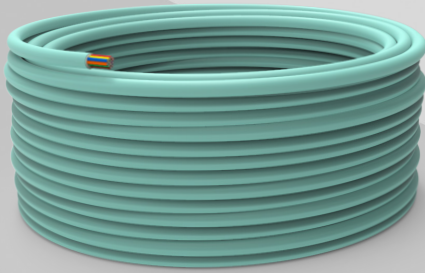

DMSI optical cables are exclusively made in the USA and are UL listed. Cables are available in many construction types including tight buffer, micro 250, ribbon, dry loose tube, and one and two fiber interconnect.

#### COMPLIANCES

- NFPAC262 for Plenum UL1666
- ICEA-S-83-596 UL Listed

### Indoor Non-Armored, ORDERING INFORMATION

#### Replace "X" with Fiber Type

Y	Single-mode OS2
G	50µm OM3
F	62.5µm OM1
M	50µm OM4
E	50µm OM2
W	50µm OM5 WBMMF

#### Replace "A" with Jacket Color - Standard is Black (K) for Indoor/Outdoor

B	Blue
K	Black (Standard for Indoor/Outdoor)
N	Orange
Y	Yellow
G	Green
V	Violet
W	Brown
S	Rose
T	Slate
A	Aqua
H	White
L	Lime Green
R	Red

#### Ribbon

Riser	Plenum	Fiber Count	Nominal OD
B004(X)(A)9	B004(X)(A)2	4	2.1mm x 4.0mm
B006(X)(A)9	B006(X)(A)2	6	2.1mm x 4.0mm
B008(X)(A)9	B008(X)(A)2	8	2.1mm x 4.0mm
B012(X)(A)9	B012(X)(A)2	12	2.1mm x 4.6mm
B024(X)(A)9	B024(X)(A)2	24	2.6mm x 4.6mm

## Tight Buffer

DMSI's tight buffered optical cable family offers a broad range of cable options, including construction, fiber count, color, and fiber type for all applications. Tight buffered cables are designed for general indoor applications, featuring a durable outer jacket, individually 900µm buffered fibers, and kevlar. Available in UL listed OFNR, OFNP, and LSZH ratings.

Riser	Plenum	Fiber Count	Nominal OD
T002(X)(A)9	T002(X)(A)2	2	4.4mm
T004(X)(A)9	T004(X)(A)2	4	4.8mm
T006(X)(A)9	T006(X)(A)2	6	4.8mm
T008(X)(A)9	T008(X)(A)2	8	5.2mm
T012(X)(A)9	T012(X)(A)2	12	6.0mm
T024(X)(A)9	T024(X)(A)2	24	7.7mm
T036(X)(A)9	T036(X)(A)2	36	15.4mm
T048(X)(A)9	T048(X)(A)2	48	15.4mm
T072(X)(A)9	T072(X)(A)2	72	19.3mm
T096(X)(A)9	T096(X)(A)2	96	22.8mm
T144(X)(A)9	T144(X)(A)2	144	25.4mm

## 1 Fiber & 2 Fiber

Riser	Plenum	Fiber Count	Nominal OD
S001(X)3(A)9	S001(X)3(A)2	1	3.0mm
R002(X)3(A)9	R002(X)3(A)2	2	3.0mm
T002(X)(A)9	T002(X)(A)2	2	4.4mm (Distribution)

## Micro 250µm

Riser	Plenum	Fiber Count	Nominal OD
M012(X)(A)9	M012(X)(A)2	12	3.0mm
M024(X)(A)9	M024(X)(A)2	24	7.0mm
M036(X)(A)9	M036(X)(A)2	36	7.0mm
M048(X)(A)9	M048(X)(A)2	48	7.0mm
M072(X)(A)9	M072(X)(A)2	72	8.2mm
M096(X)(A)9	M096(X)(A)2	96	10.4mm
M0144(X)(A)9	M0144(X)(A)2	144	13.0mm
M0288(X)(A)9	M0288(X)(A)2	288	18.4mm

## Simplex and Duplex Zipcord

Riser	Plenum	Fiber Count	Nominal OD
S001(X)6(A)9	S001(X)6(A)2	1	1.6mm
S001(X)2(A)9	S001(X)2(A)2	1	2.0mm
S001(X)3(A)9	S001(X)3(A)2	1	3.0mm
Z002(X)6(A)9	Z002(X)6(A)2	2	1.6mm
Z002(X)2(A)9	Z002(X)2(A)2	2	2.0mm
Z002(X)3(A)9	Z002(X)3(A)2	2	3.0mm