


CLASSIC CONNECTIVITY

Adapter Panels

--
Standard

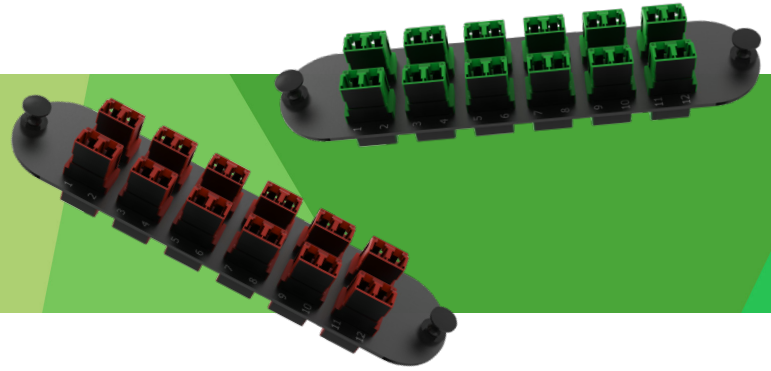

Adapter panels are available with any industry standard connector type and fiber counts from 3 to 24 per panel. Panels are a durable powder coated black steel with ports numerically labeled in white print. LC and SC connector types are available in non-keyed color coded in addition to the TIA standard colors.

STANDARD COMPLIANCES

- TIA/EIA-455-21A
- TIA/EIA 568-B.3
- TIA/EIA-604-10, LC Connectors
- TIA/EIA-604-3, SC Connectors
- TIA/EIA-604-2, ST Connectors
- TIA/EIA-604-4, FC Connectors
- TIA/EIA-604-12, MTRJ Connectors
- TIA/EIA-604-5, MPO (Including MTP®) Connectors

Classic Adapter Panels, ORDERING INFORMATION

Part #	Adapter Type
DMAPC-(XX)(A)21	FC
DMAPC-(XX)(A)28	FC/APC
DMAPC-(XX)(A)30	LC Simplex
DMAPC-(XX)(A)31	LC Duplex
DMAPC-(XX)(A)38	LC/APC Duplex
DMAPC-(XX)(A)39	LC/APC Simplex
DMAPC-(XX)(A)3S	LC Duplex Internally Shuttered
DMAPC-(XX)(A)44	MTRJ
DMAPC-(XX)(A)45	MTP®
DMAPC-(XX)(A)60	SC Simplex
DMAPC-(XX)(A)61	SC Duplex
DMAPC-(XX)(A)65	SC/APC Simplex
DMAPC-(XX)(A)68	SC/APC Duplex
DMAPC-(XX)(A)67	ST
DMAPC-(XX)(A)Q1	LC Quad (LGX Only)
DMAPC-(XX)(A)Q8	LC/APC Quad
DMAPC-(XX)(A)QS	LC Quad Internally Shuttered*
DMAPC-BLNK	Blank

(XX)	Replace (XX) with Fiber Count
06 - 24	
(A)	Replace (A) with Fiber Type
Y	Single mode
F	62.5µm OM1
E	50µm OM2
G	50µm OM3/4
W	50µm OM5 (WBMMF)

NOTES

- Adapters are colored per fiber and polish type. Single-mode UPC are blue, APC are green.
- OM1 are beige, OM2 black, OM3/4 aqua, and OM5 are lime green.
- ST and FC are metal bodied with color dust caps.
- MTP® Single-mode connectors are standard APC polish, green housing colors. Low loss performance is mustard.
- Many other colors are available for MTP® adapters, please consult the MTP® Solutions section for additional information.

* Internally Shuttered LC adapters are only available in a quad port adapter for 24 fiber LGX compatible panels